

HIGH QUALITY DURABLE MATERIALS


Manufactured from Strong 304 grade stainless steel and UV Stabilised High Quality Glass Fibre Reinforced Nylon giving a weather, termite, fungi and bacterial resistance




MAXIMUM WORKING PRESSURE
10 Bar (145 psi)
@ 20°C

MULTIPLE CONFIGURATIONS

Multiple connections enables this fitting to meet the needs of just about any situation. All connections available in sizes 20mm, 25mm or 32mm (3/4", 1", 1 1/4" BSPT).

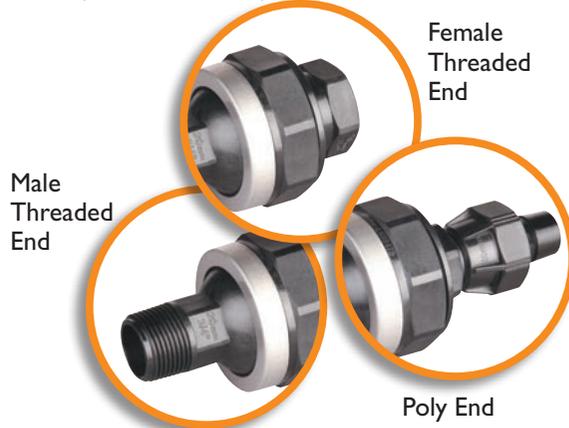

ULTIMATE FLEXIBILITY AROUND PUMPS
The Hansen Knuckle Union is the ultimate quick connect/disconnect solution around pumps. With a flexible 'knuckle' joint of up to 9 degrees movement, now you don't have to worry if your pipe work doesn't line up exactly with your pump, the flexible Hansen Knuckle Union takes care of that for you!

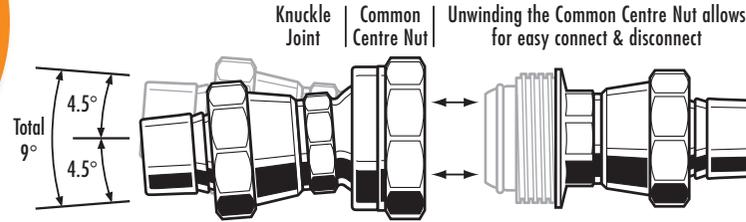

Total of 9 Degrees Movement



TIME TESTED CONNECTIONS


Uses the same time tested Hansen Easy Fit and True Fit connections as in other ranges.



POTABLE WATER APPROVED

Materials approved for use with Potable (drinkable) Water

AS/NZS 4020:2018

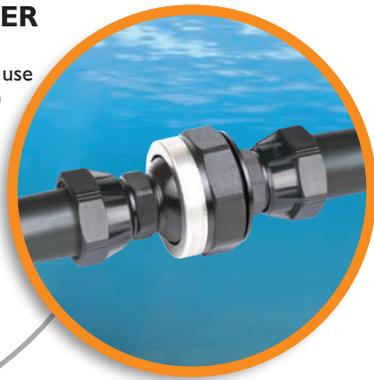

EASY TO USE

As with all Hansen fittings, simplicity & ease of use remain at the core of the Hansen Quick Connect Knuckle Union.

3. Insure the Common Centre Nut is firmly tightened. Do not over tighten.



1. Line up the two ends of the Quick Connect Knuckle Union



2. Join the two parts together by winding the Common Centre Nut onto the matching Male Thread

HANSEN
Quick Connect Unions

Ultimate Flexible and Adaptable Unions

www.hansenproducts.com